


ALUMERO

EN

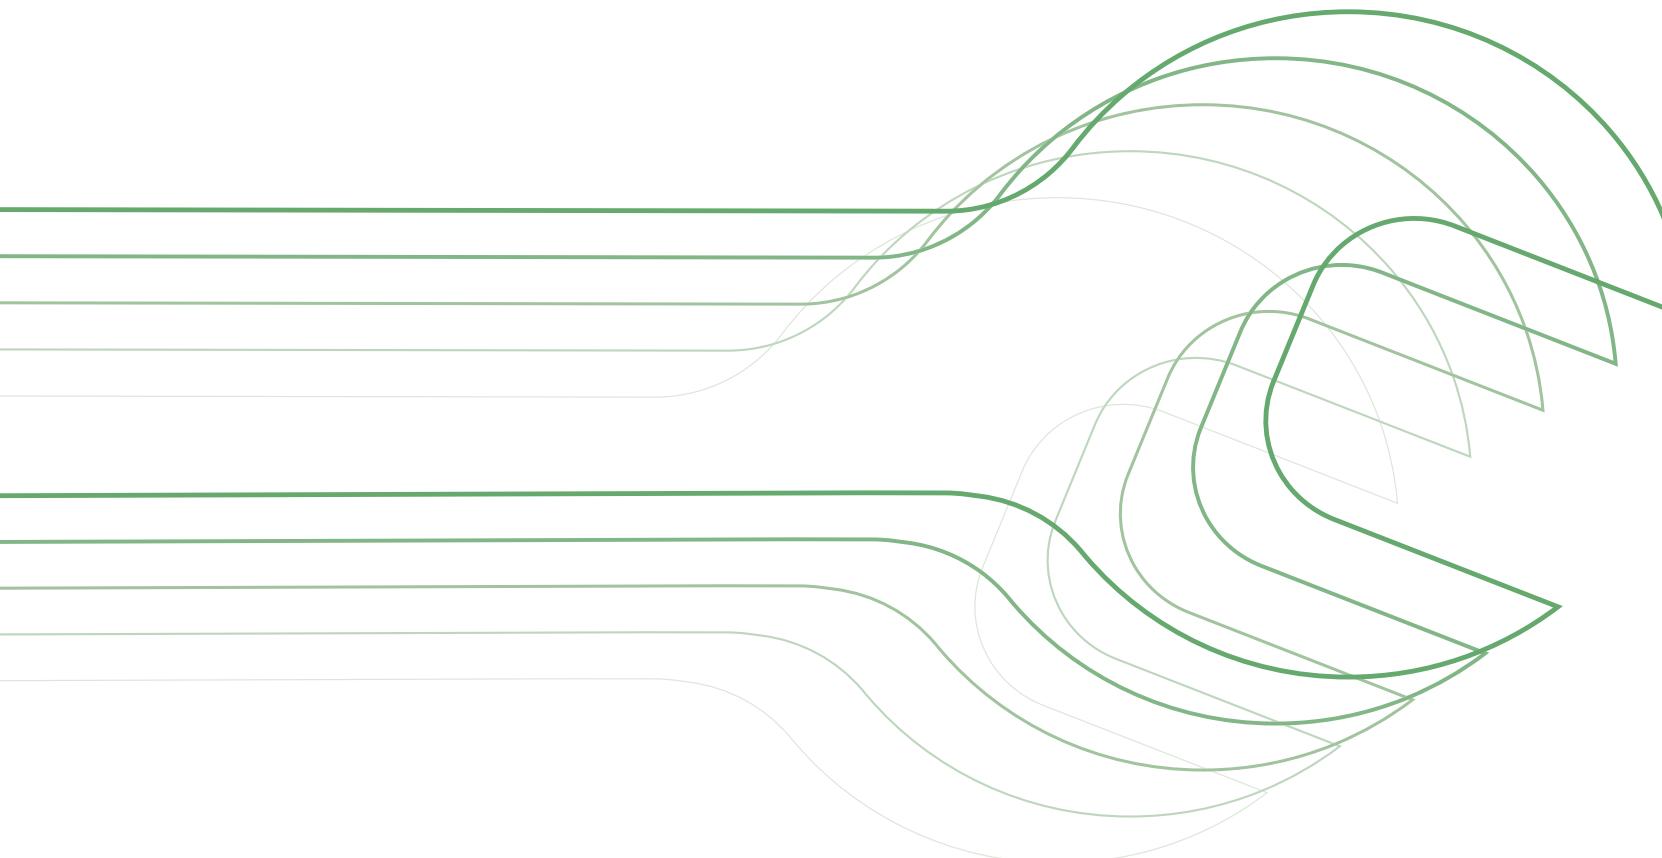

Tile replacement board

ASSEMBLY MANUAL




SUSTAINABLE
SOLAR
SOLUTIONS

General information

Material: Aluminium

Minimum roof pitch*: 15°


Max. deck length: 430mm

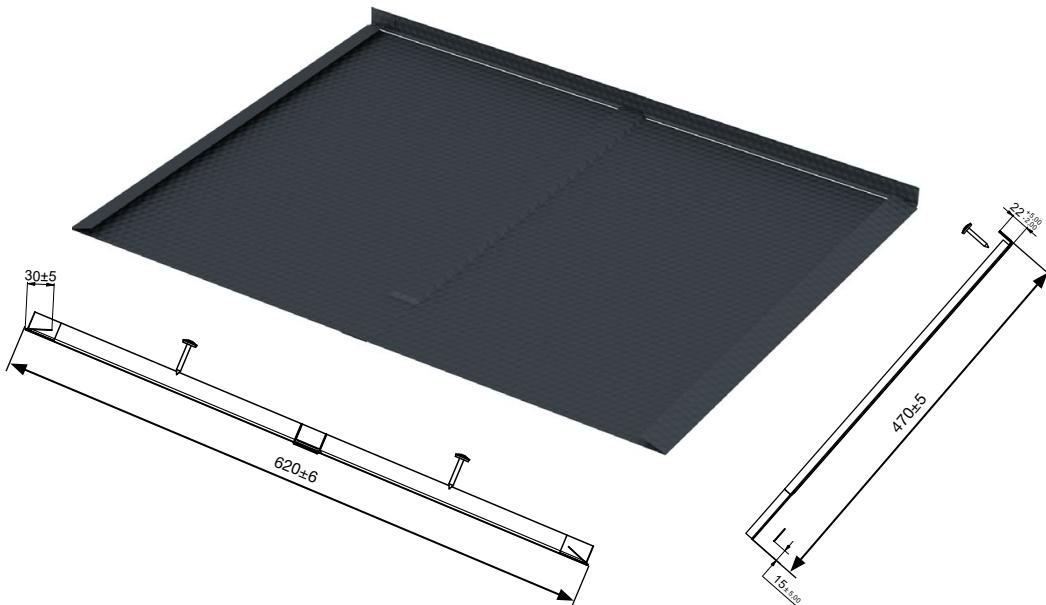

TOOLS REQUIRED



Cordless screwdriver
with bit inserts:
TX 20 / TX 40



Knife

INSTALLATION INSTRUCTIONS

- + To achieve optimum sealing, roof tiles and bricks must be dry and free of dirt and dust.
- + Processing temperature +5 to +30 °C
- + It is recommended that Alumero ZEP is not installed directly above or next to each other.
- + Sacking must be avoided.
- + Cable protection must be ensured.

*Standard roof pitch can be undercut in accordance with ZVDH specifications.

COMPONENTS

STANDARD



Tile replacement board
Brick red RAL 8004
Product No.: 802630



Tile replacement board
Anthracite RAL 7016
Product No.: 802631



Sealing strip
Supplied as a set with 802630 or 802631



2x Sheet metal screw (4x 30mm, TX20)
Supplied as a set with 802630 or 802631

COMPATIBILITY

Braas Doppel-S Pfanne Jacobi J 11V
Braas Frankfurter Pfanne Jacobi Z10
Braas Granat 11V Karthago-Pfanne
Braas Harzer Pfanne Koramic Actua 10
Braas Harzer Pfanne 7 Koramic Alegra 15
Braas Rubin 11V Koramic Cosmo 11
Braas Rubin 13V Koramic Mondo 11/L42
Braas Rubin 15V Koramic Tradi 12
Braas Rubin 9V Koramic Mondo 15 / 15 S
Braas Taunus Pfanne Koramic Plano 11
Braas Tegalit Koramic Universo 10
Braas Turmalin Koramic Universo 14

Creton Cantus Koramic Alegra 12
Creton Domino Meindl Megaton MZ5
Creton Eleganz Meyer-Holsen Dacapo
Creton Futura Meyer-Holsen Doppelfalzziegel
Creton Harmonie Meyer-Holsen Garant
Creton Maxima Pro Meyer-Holsen Piano
Creton Mikado Meyer-Holsen Ravensberger
Creton Ratio Nelskamp F12 Ü
Creton Regius Nelskamp Finkenberger Pfanne
Creton Terra Optima Nelskamp Kronen Pfanne
Creton Visio Nelskamp Planum
Creton Rustico Nelskamp Sigma Pfanne

Erlus Linea Nelskamp S-Pfanne
Erlus E58 / E58 S Tondach A11
Erlus E58 MAX Tondach Fidelio
Erlus E58 SL / SL-D Tondach Figaro
Erlus Forma Tondach Landdach
Erlus Großfalzziegel Tondach Mulde
Erlus Großfalzziegel XXL Tondach Norma
Erlus Reformpfanne SL Tondach Sulm
Erlus Reformpfanne XXL Tondach V11
Falzziegel -A- Walther Stylist
Falzziegel Rustico Walther W4

Note: this sheet contains recommendations, installation must always be assessed by a specialist on site.

Note: the tile types listed have already been tested in the factory. All brands not listed must be tested for usability on site.

However, the actual installability of the tile replacement panel must always be assessed by a specialist on site.

INSTALLATION

Create opening



INSTALLATION

Remove original roof tiles



INSTALLATION

Insert ALUMERO tile replacement board on one side



INSTALLATION

Remove the protective film from the adhesive strip




INSTALLATION

Cover the tile replacement board
on the other side




INSTALLATION

Mould the tile replacement board to the contour of the tile, starting in the centre and working outwards, and press down firmly

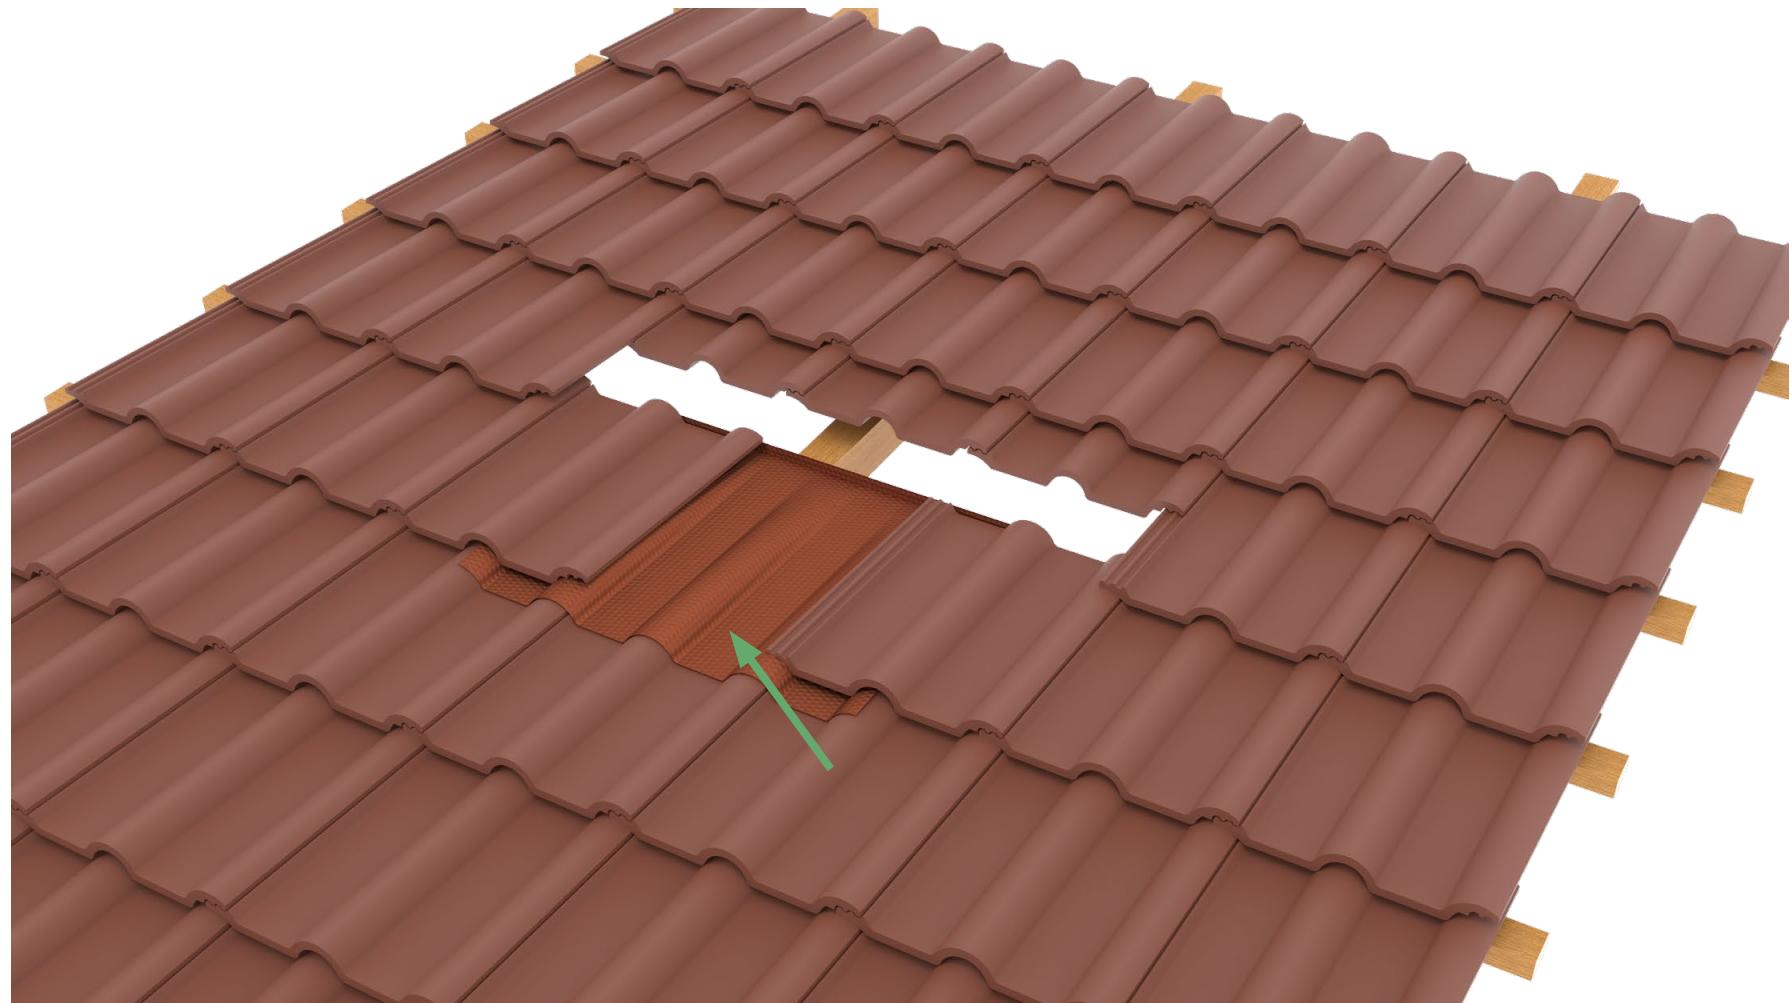

INSTALLATION

Fix the panel with sheet metal screws

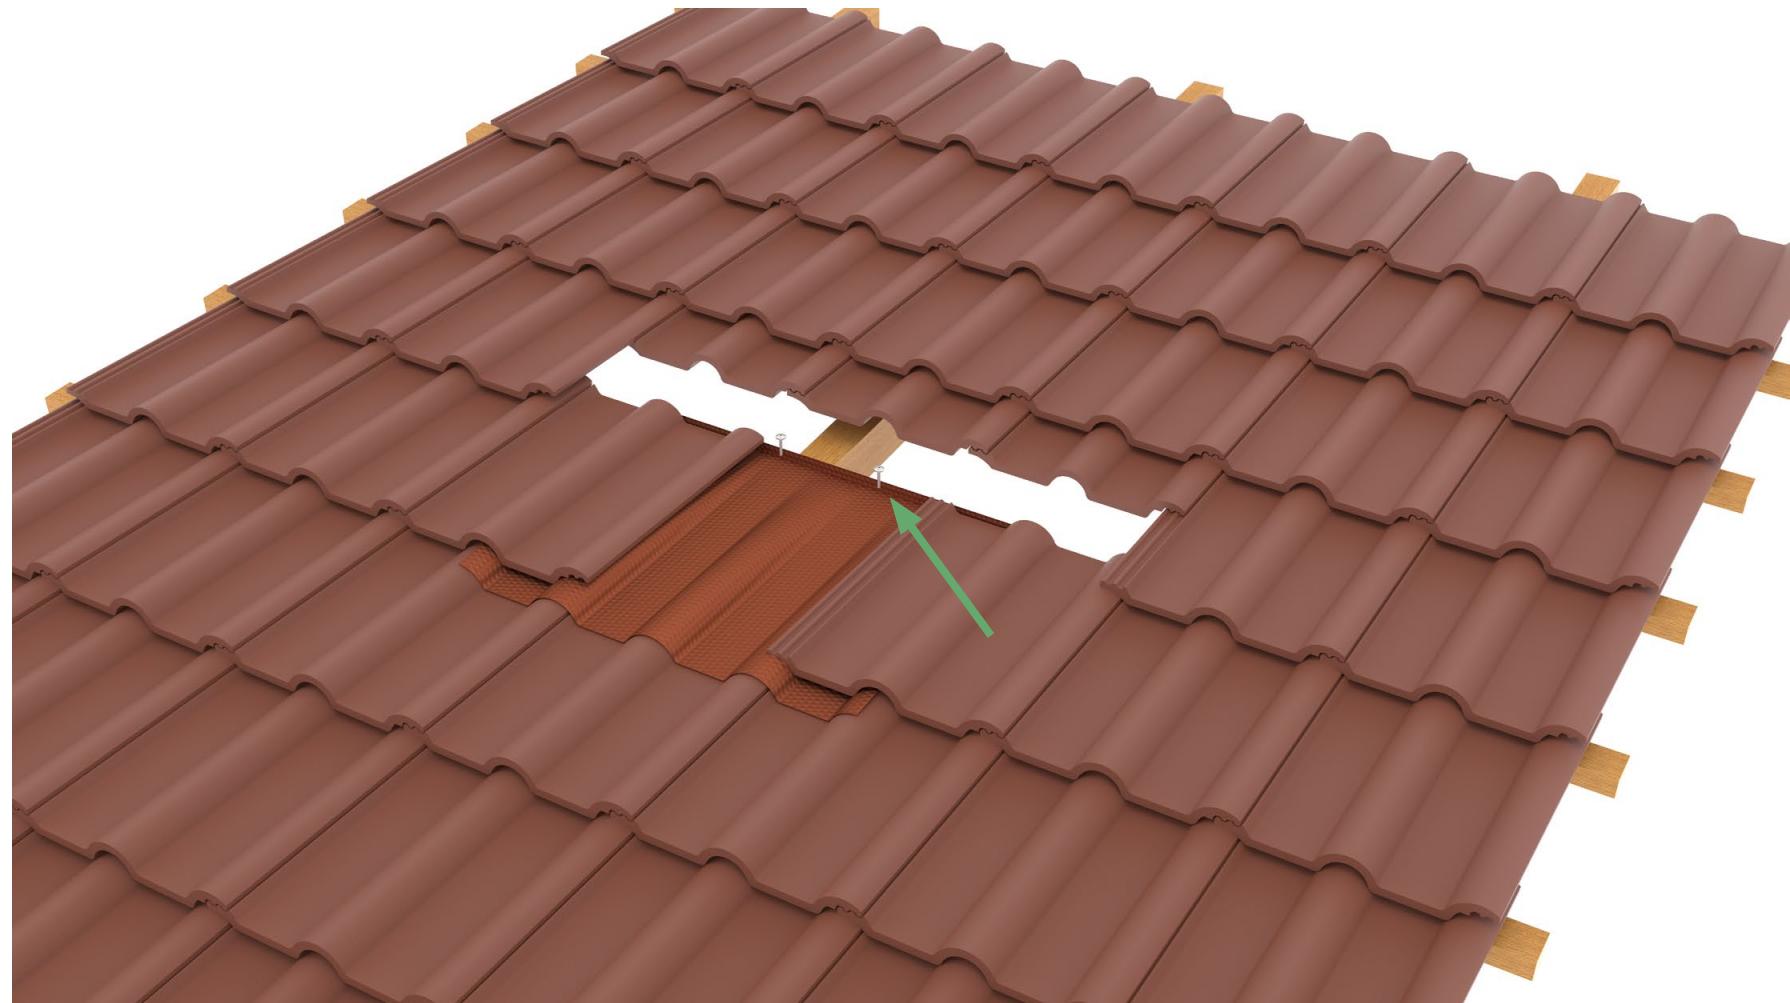


INSTALLATION

Remove the protective film from the fillet sealing strip and apply it flush to the top edge



INSTALLATION

Cut L-shaped fillet sealing strip
at roof hook position

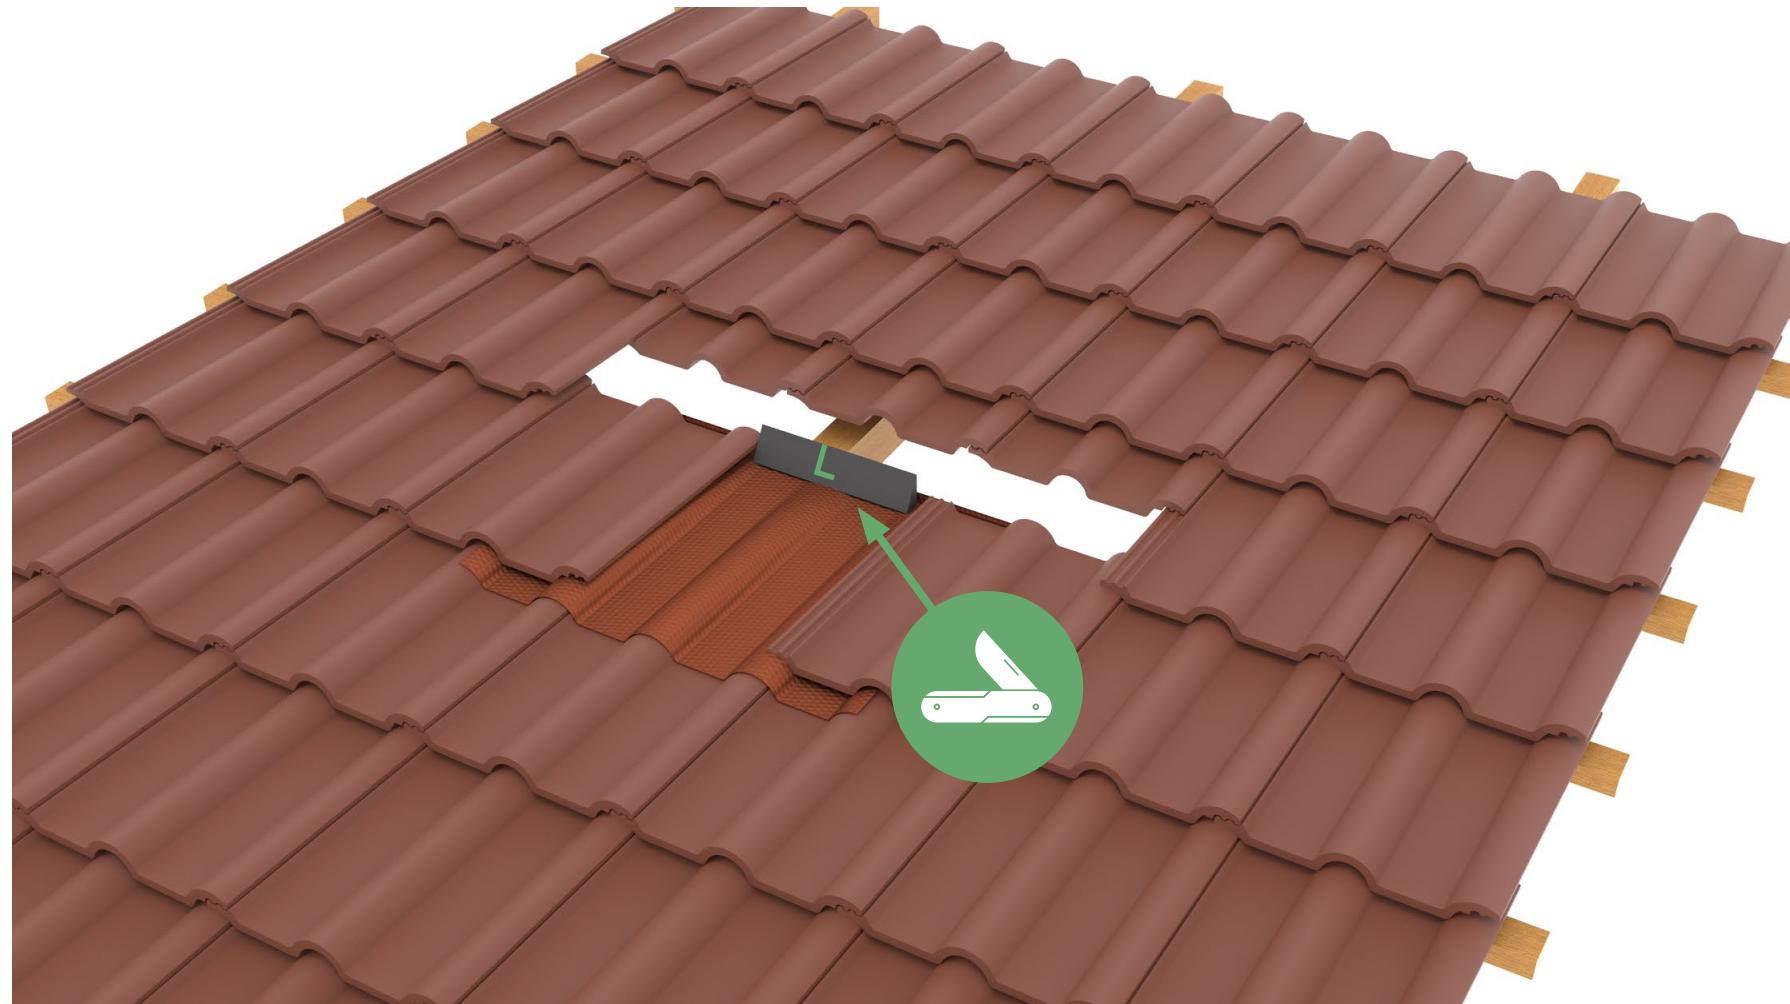

INSTALLATION

Insert and fasten roof hooks in valley strips



INSTALLATION

Put tiles back into place



INSTALLATION

Put tiles back into place



Finished!

PLEASE NOTE THE FOLLOWING ADDITIONAL DOCUMENTS!

The following documents are required in addition to the installation instructions and for correct installation of the system:

- + Project report from ALUMERO.PRO.TOOL
- + Planning documents and drawings
- + The generally applicable document "Installation instructions" at <https://www.alumerogroup.eu/service> under "General" -> "Other"

Please also inform yourself about the safety regulations of the other system components.

**CONGRATULATIONS,
WELL DONE!**



**SUSTAINABLE
SOLAR
SOLUTIONS**

ALUMERO Systematic Solutions GmbH
Sonnenweg 1-2 | 5162 Seeham - Österreich
T +436217 / 68 41 - 0
alumero@alumero.at | www.alumero.at